





Top

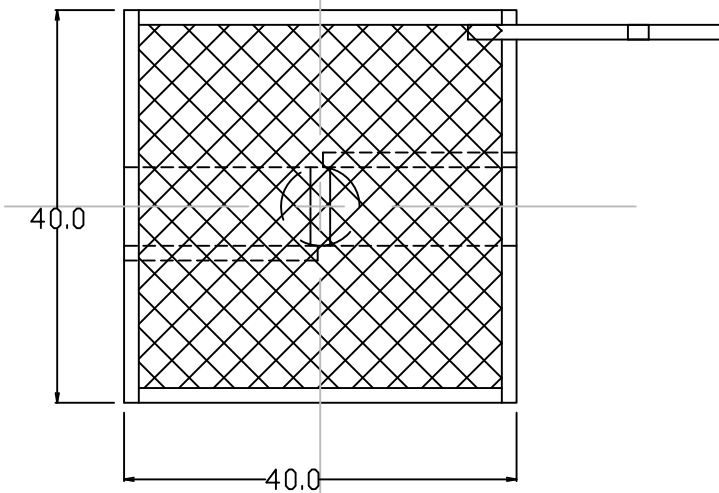

Side

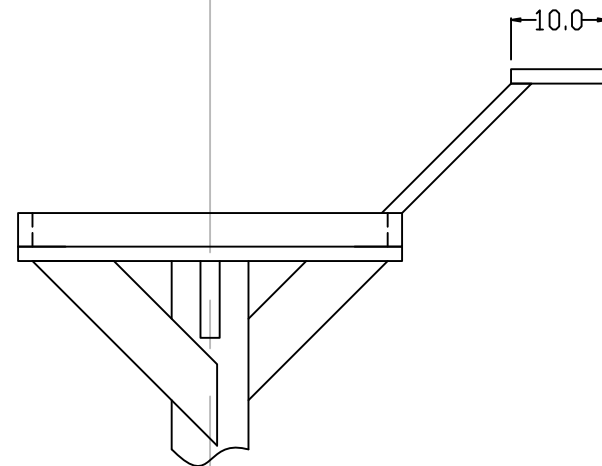

Front

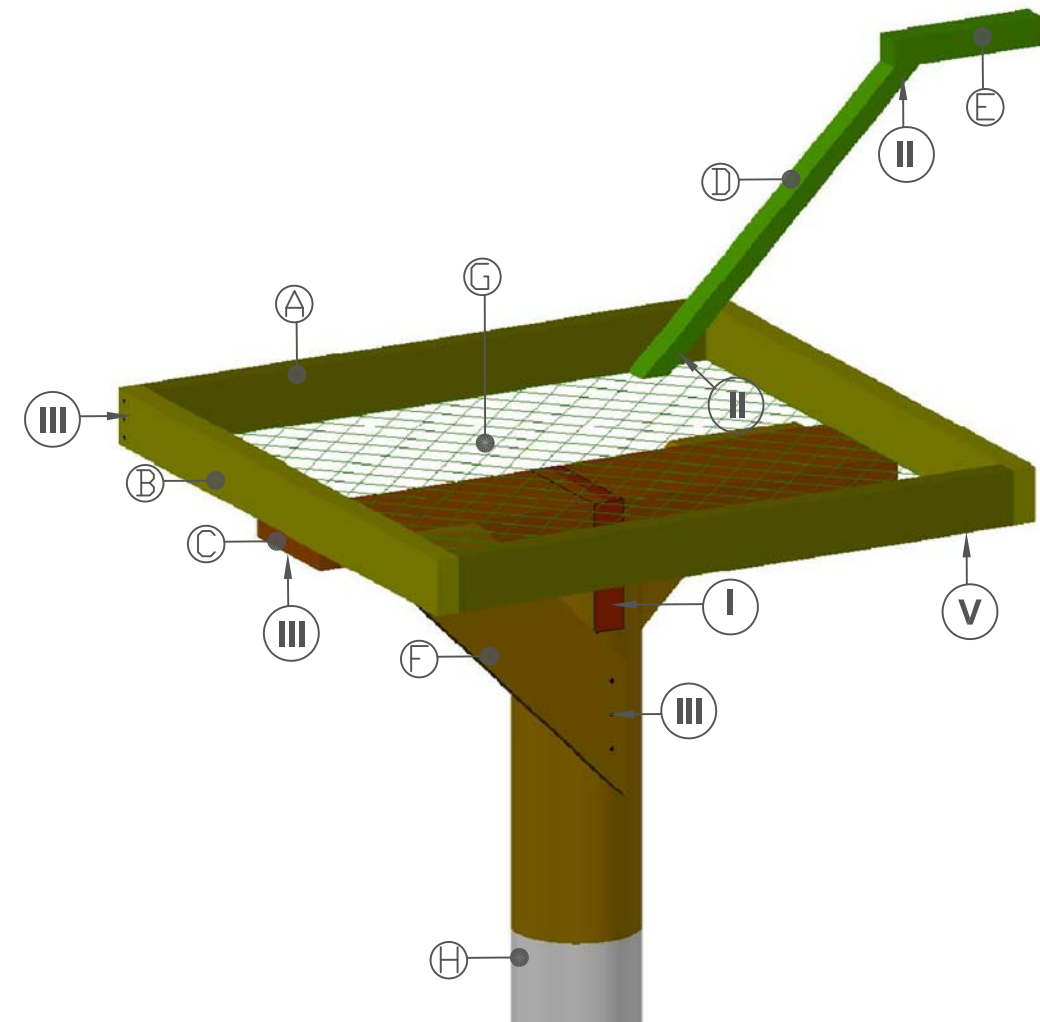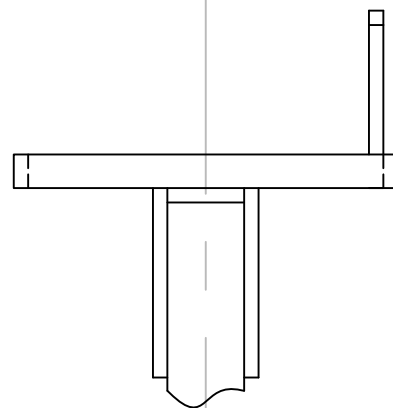

List of Materials:

- A) 2ea. 37" x 2" x 4" pressure treated lumber
- B) 2ea. 40" x 2" x 4" pressure treated lumber
- C) 1ea. 40" x 2" x (6" or 8") pressure treated lumber
- D) 1ea. 24" x 2" x 2" pressure treated lumber
- E) 1ea. 10" x 2" x 2" pressure treated lumber
- F) 2ea. 22" (long side) 5/4" braces cut at 45 degree angles.
- G) 1ea. 40" square of chain link fence
- H) 1ea. 3' x 18" aluminum flashing (optional)

- I) 1ea. 24" galvanized steel strap
- II) 4ea. galvanized screws (3 1/2") or deck screws (pre-drill with $\frac{9}{64}$ " to prevent splitting)
- III) 32ea. 16 penny galvanized ring shank nails (pre-drill with $\frac{9}{64}$ " to prevent splitting)
- IV) 20ea. 1-1/8" galvanized fence staples
- V) 10ea. 1 1/4" galvanized strapping nails

THE INTERNATIONAL OSPREY
FOUNDATION

www.ospreys.com

OSPERY PLATFORM
WOOD POLE MOUNT

DATE REVISED 3-23-11 REV A
SCALE N.T.S.

0001